

MODEL GC12-BLC

VOLTAGE 12

MATERIAL Polypropylene

DIMENSIONS Inches (mm)

BATTERY Deep-Cycle Flooded/Wet Lead-Acid Battery

COLOR Black



12 VOLT

PHYSICAL SPECIFICATIONS

MODEL NAME	VOLTAGE	C5	C20	56A	DIMENSIONS ° INCHES (MM)				WEIGHT (kg)
GC12-BLC	12	120Ah	150Ah	98 min	L	W	H	TH	37.0kg
					330mm	182mm	245mm	275mm	

CHARGING INSTRUCTIONS

- Special high density lead paste for grids, to ensure long life cycles performance.
- Multiple alloy formula for grids to ensure long life and high reliability.
- High quality PE separator with strong corrosion resistance, small aperture and high porosity.
- Long life, high power, good vibration resistance and charge acceptance, low self-discharge, and adaptability at high and low temperature environments.

OPERATIONAL DATA



OPERATING TEMPERATURE	SELF DISCHARGE
-20°C~45°C(-4°F~113°F) Keep the SOC ≥ 60% if lower than 0°C	5%-15%/month based on storage temperature conditions

TERMINAL

H(mm)	38
Nm(Nm)	10.7
BOLT SPECIFICATION	M8 (Metric)

V-MIC-SOC- INSTRUCTIONS

CAPACITY%	CONCENTRATION	CELL VOLTAGE	6 VOLT	8 VOLT	12 VOLT
100	1.289	2.134	6.40	8.54	12.80
90	1.268	2.113	6.34	8.45	12.68
80	1.246	2.091	6.27	8.36	12.55
70	1.225	2.07	6.21	8.28	12.42
60	1.204	2.049	6.15	8.20	12.29
50	1.178	2.023	6.07	8.09	12.41
40	1.152	1.997	5.99	7.99	11.98
30	1.128	1.973	5.92	7.89	11.84
20	1.102	1.947	5.84	7.79	11.68
10	1.078	1.923	5.77	7.69	11.54

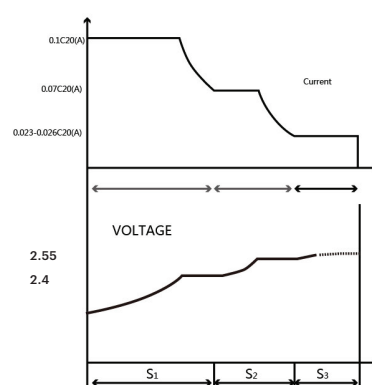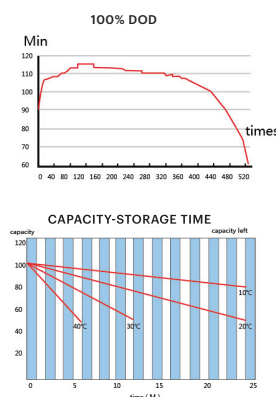

RECYCLE RESPONSIBLY

