

MODEL GC8-BLC

VOLTAGE 8

MATERIAL Polypropylene

DIMENSIONS Inches (mm)

BATTERY Deep-Cycle Flooded/Wet Lead-Acid Battery

COLOR Black



8 VOLT

PHYSICAL SPECIFICATIONS

MODEL NAME	VOLTAGE	C5	C20	56A	DIMENSIONS ° INCHES (MM)				WEIGHT (kg)
GC8-BLC	8	140Ah	170Ah	115 min	L	W	H	TH	29.0kg
					260mm	183mm	248.5mm	289mm	

CHARGING INSTRUCTIONS

- Special high density lead paste for grids, to ensure long life cycles performance.
- Multiple alloy formula for grids, to ensure the long life and high reliability.
- High quality PE separator, with resistance, strong corrosion resistance, small aperture and high porosity.
- Long life, high power, good vibration resistance, small self-discharge, good at high and low temperature environment adaptability, charging acceptance ability.

OPERATIONAL DATA



OPERATING TEMPERATURE	SELF DISCHARGE
-20°C~45°C (-4°F~113°F) Keep the SOC ≥ 60% if lower than 0°C	5%-15%/month base on storage temperature condition

TERMINAL

H(mm)	38
Nm(Nm)	10.7
BOLT SPECIFICATION	M8 (Metric)

V-MIC-SOC- INSTRUCTIONS

CAPACITY%	CONCENTRATION	CELL VOLTAGE	6 VOLT	8 VOLT	12 VOLT
100	1.289	2.134	6.40	8.54	12.80
90	1.268	2.113	6.34	8.45	12.68
80	1.246	2.091	6.27	8.36	12.55
70	1.225	2.07	6.21	8.28	12.42
60	1.204	2.049	6.15	8.20	12.29
50	1.178	2.023	6.07	8.09	12.41
40	1.152	1.997	5.99	7.99	11.98
30	1.128	1.973	5.92	7.89	11.84
20	1.102	1.947	5.84	7.79	11.68
10	1.078	1.923	5.77	7.69	11.54

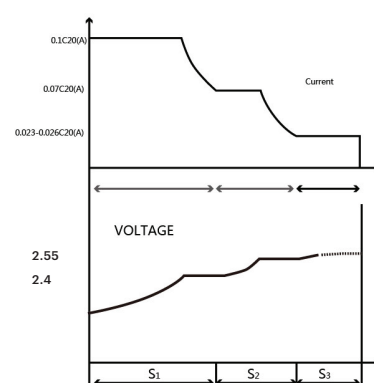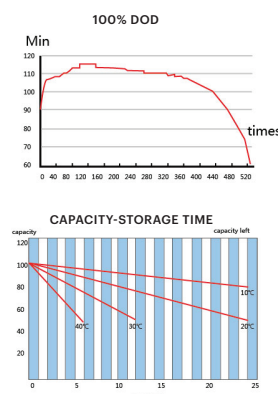

RECYCLE RESPONSIBLY

99% RECYCLABLE		12V Flooded
-------------------	--	----------------

